


.70 NRC


**F6 MOUNT
WITH ½" GAP**

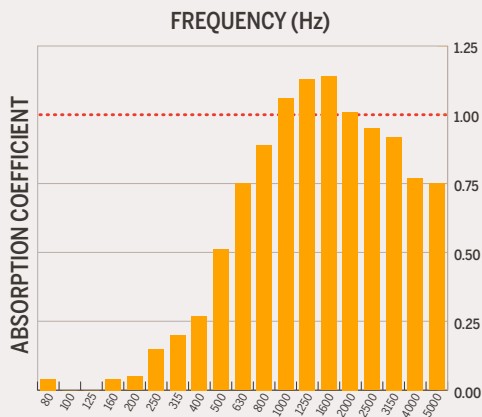

HERTZ			80	100	125	160	200	250	315	400
ABSORPTION			.04	.00	.00	.04	.05	.15	.20	.27
500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
.51	.75	.89	1.06	1.13	1.14	1.01	.95	.92	.77	.75

.95 NRC


**F6 MOUNT
WITH ½" GAP +
1" THICK, 6LBS INSULATION**

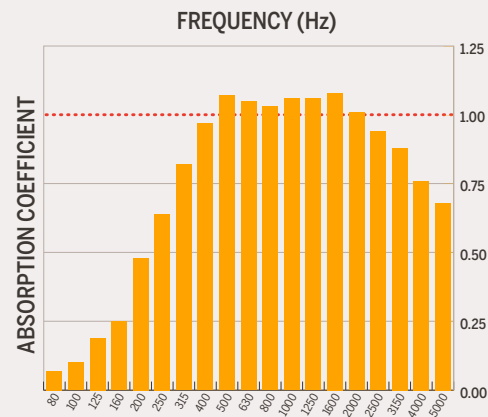

HERTZ			80	100	125	160	200	250	315	400
ABSORPTION			.07	.10	.19	.25	.48	.64	.82	.97
500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
1.07	1.05	1.03	1.06	1.06	1.08	1.01	.94	.88	.76	.68

.85 NRC


E400 MOUNT

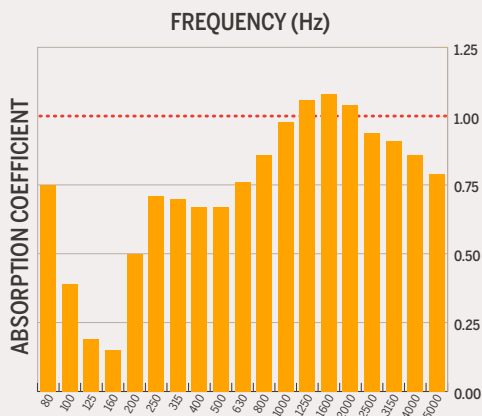

HERTZ			80	100	125	160	200	250	315	400
ABSORPTION			.75	.39	.19	.15	.50	.71	.70	.67
500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
.67	.76	.86	.98	1.06	1.08	1.04	.94	.91	.86	.79

.90 NRC

**E400 MOUNT
+ 2" THICK, 3LBS INSULATION**

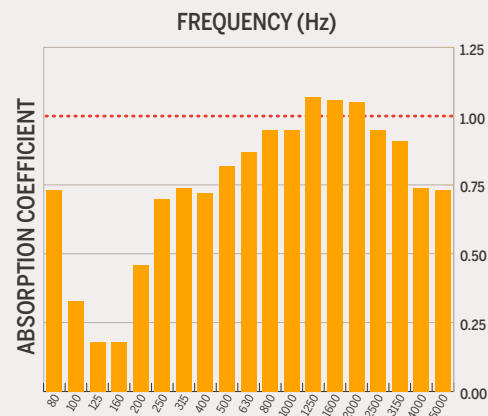

HERTZ			80	100	125	160	200	250	315	400
ABSORPTION			.73	.33	.18	.18	.46	.70	.74	.72
500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
.82	.87	.95	.95	1.07	1.06	1.05	.95	.91	.74	.73